

A Numerical Study on Two-Dimensional Fins with Non-Constant Heat Flux

Navid Namdari¹, Behrouz Mohammadian¹, Amir Dehghanghadikolaei², Soheila Alidad³,
Majid Abbasi⁴

¹Mechanical Engineering Department, University of Toledo, OH, USA

²Mechanical Engineering Department, Oregon State University, OR, USA

³Bioengineering Department, University of Toledo, OH, USA

⁴Mechanical Engineering Department, Isfahan University of Technology, Isfahan, Iran

Email address: ¹navid.namdari@rockets.utoledo.edu

Abstract— In this study, the COMSOL Multiphysics mathematics toolbox was employed in order to analyze the steady state heat transfer of extended surfaces. The simulation results for a two-dimensional problem were validated with the Fourier series analytical solution derived for the case in the literature. The results of COMSOL were shown to have a good agreement with analytical Fourier series approach. Moreover, using the simulation model, a comparison was made between the fins with a convective and isolated tip. The results demonstrated that the fin with a convective tip has about 5% higher rate of heat transfer.

Keywords— COMSOL, Fin, Simulation, Steady state heat transfer, Variable heat transfer coefficient.

I. INTRODUCTION

Fins or extended surfaces are used to increase heat transfer rate from a surface to the environment [1, 2]. Depending on applications, they have been used in different areas like integrated circuits (ICs), engines, turbines, heat exchangers, electronic equipment, and biological wastewater treatment systems [3-5]. There are various geometries of fins available depending on the application and production procedure. In particular, straight fins are very common because of simple geometry and lower production cost.

In the literature, fin problems have been considered with a constant heat transfer coefficient through the surface of the fin [6]. Nonetheless, in reality, this assumption is not valid because heat transfer rate can be different along the entire length of the fin [7]. For instance, heat transfer rate was reduced by almost 40% when a linearly increasing heat transfer coefficient was selected for a finite difference analysis method [8]. Leading edge, boundary layer, and turbulence are the factors that play key roles in variations of heat transfer coefficient along the fin surface. Hence, conducting studies on the heat transfer of the fins with a variable heat transfer coefficient is important from the practical perspective.

Heat transfer analysis of fins has been done through experimental, computational, and analytical methods. Han et al. considered a power series to model a one-dimensional fin with a rectangular profile and constant heat transfer coefficient, while Chen et al. treated the same problem with an exponential distribution of heat transfer [9, 10]. Additionally, a study was conducted on an annular triangular fin with a linearly increasing heat transfer coefficient from the base to the tip. These studies, however, are only useful for special experimental cases and cannot provide accurate solutions for other cases. The two-dimensional (2D) study is an appropriate method in order to analyze the efficiency and heat transfer of straight fins in reality. Heggs et al. showed using Biot number,

Bi, one-dimensional heat transfer can be used instead of 2D analysis if the transverse Bi is much less than one [11]. Heat flux was reported much lower (80%) when a 2D analysis implemented [12]. Therefore, the 2D analysis is very important for both practical and theoretical problems. Ma et al. presented analytical solutions for 2D heat transfer analysis of fins with a variable heat transfer coefficient [13]. However, they showed that the classical solution represented in [6] is computationally more efficient than their method and also can be used for a 2D problem with a variable heat transfer coefficient along the fin.

In this study, a numerical approach was employed by the COMSOL mathematical toolbox to simulate a 2D fin with a variable heat transfer and an adiabatic tip in steady state condition and then the results verified with the analytical approach presented in Ma et al.

II. ANALYTICAL SOLUTION FOR A FIN WITH AN ADIABATIC TIP

Consider a fin as presented in Fig 1. According to Fig. 1, a rectangular fin with dimensions of $2B \times L$ dissipates heat only through convection with a variable heat transfer coefficient, $h(x)$. The surrounding temperature is T_∞ , the tip has a heat transfer coefficient of $h_L=0$ (adiabatic tip), and T is the temperature of the base. The 2D heat transfer equation for a homogenous material under steady state condition and no heat generation is presented by

$$\frac{\partial^2 \phi(x,y)}{\partial x^2} + \frac{\partial^2 \phi(x,y)}{\partial y^2} = 0, \quad (1)$$

where $\phi(x,y)$ is a dimensionless temperature:

$$\phi(x,y) = \frac{T - T_\infty}{T_b - T_\infty} \quad (2)$$

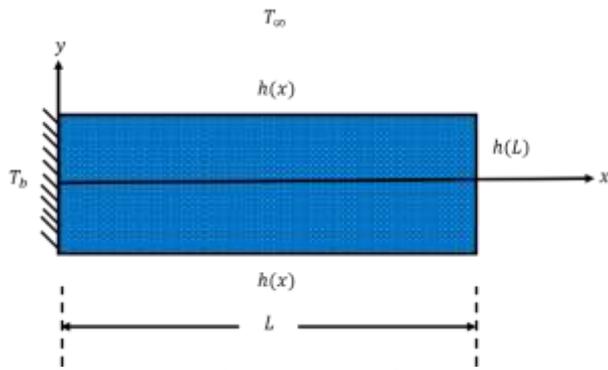


Fig. 1. Schematic of a 2D fin.

In order to solve (1), boundary conditions must be defined in boundaries. The boundary conditions for the heat transfer problem are:

$$\phi = 1, \quad x = 0, \quad 0 \leq y \leq B; \quad (3)$$

$$-\frac{\partial \phi}{\partial x} = 0, \quad x = L, \quad 0 \leq y \leq B; \quad (4)$$

$$\frac{\partial \phi}{\partial y} = 0, \quad y = 0, \quad 0 \leq x \leq L; \quad \text{and} \quad (5)$$

$$-\frac{\partial \phi}{\partial y} = \frac{h_c}{k} \phi, \quad y = B, \quad 0 \leq x \leq L, \quad (6)$$

where k and h_c are the thermal conductivity of the fin material and the constant heat transfer coefficient, respectively.

The solution to (1) for a fin with an adiabatic tip with the following boundary conditions is represented in (7):

$$\phi(x, y) = \sum_{i=1}^{\infty} \frac{2H \cosh \beta_i(L-x) \cos \beta_i y}{[B(\beta_i^2 + H^2) + H] \cosh \beta_i L \cos \beta_i B} \quad (7)$$

In the (7), H is presented by

$$H = \beta_i \tan \beta_i B = \frac{h_c}{k} \quad (8)$$

where β_i are the roots of the transcendental equation.

Equation (7) can be used either with a constant or variable heat transfer coefficient along the x -direction as long as the Dirichlet boundary condition is used, i.e. $h(x)$ should have a finite constant value throughout the boundary. In addition, the Dirichlet boundary condition cannot apply to unbounded numbers of minimums and maximums for $h(x)$ on the $(0, L)$ interval [13].

Ma et al. considered a cubic fin as shown in Fig. 2. The fin has a thermal conductivity of $100 \text{ W m}^{-1} \text{ K}^{-1}$. The heat transfer coefficient of 50 and $100 \text{ W m}^{-2} \text{ K}$ are selected for the first 0.01 m and the remaining 0.03 m, respectively. In the next part of the present study, a numerical simulation is carried out and the results are compared to the analytical results in order to validate the accuracy of the numerical solution.

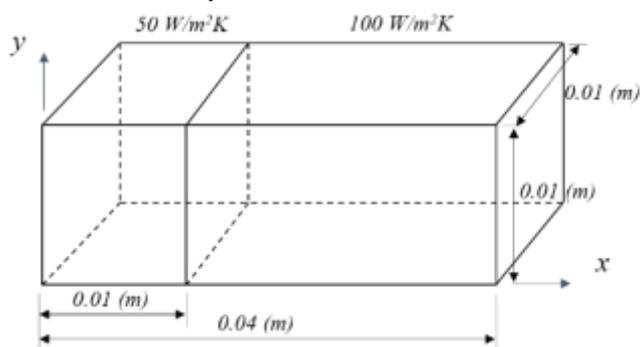


Fig. 2. A fin with a variable heat transfer coefficient.

III. NUMERICAL SOLUTION IN COMSOL

Numerous studies have been done in order to analyze the solutions of steady state and transient responses in fins with different shape [14-18]. Scholars have used various finite element software programs and approaches such as ABAQUS, ANSYS, FLUENT, and COMSOL in areas of mechanical engineering, bioengineering, and chemical engineering, since the finite element method (FEM) technique facilitates design development and can be used to reduce the time-consuming and costly experimental trial-and-error procedures in order to obtain an accurate solution [19-47]. Moreover, FEM techniques used in the computational software show they can provide a very close approximation to complex mathematical and physical problems. In particular, COMSOL Multiphysics is a strong FEM software program that has an advantage of having a useful partial differential equation (PDE) solver, helpful for obtaining solutions to complex problems in different fields like mechanical engineering, physics, and chemical engineering.

A 2D model of a fin with a variable heat transfer coefficient presented in the previous section was simulated in COMSOL, using the heat equation available in the PDE toolbox of the software. The steady state temperature distribution contour of the fin with a variable heat transfer coefficient is illustrated in Fig. 3.

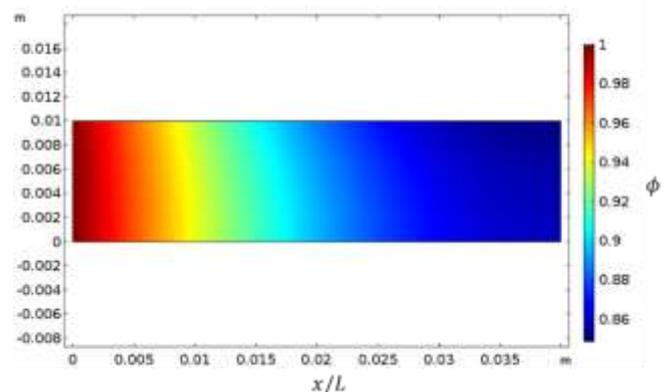


Fig. 3. Steady state temperature distribution of a fin with non-constant heat transfer coefficient.

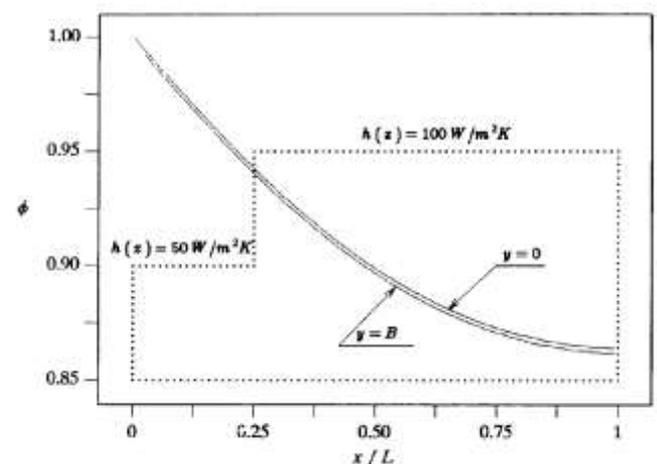


Fig. 4. Analytical solution for the presented fin with a variable heat transfer [13].

Each numerical solution needs to be validated with a different experimental or analytical approach. In this study, the solution obtained by the COMSOL classical PDE solver was validated by comparing the results to the analytical solution in Ma et al. study [13]. Fig. 4 shows the analytical solution of the fin with boundary conditions and heat transfer coefficients according to the problem introduced in Fig. 2. For validation purposes, the temperature distribution at $y=0$ and $y=B$ along the fin length is plotted using COMSOL. Fig. 5 shows the results of the 2D simulation in COMSOL. As it can be seen, the results of temperature distribution are in a good agreement with Ma et al. with less than 5% error.

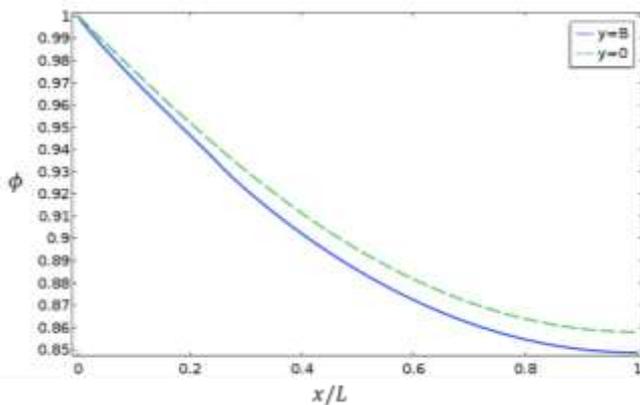


Fig. 5. Solution of the problem using COMSOL.

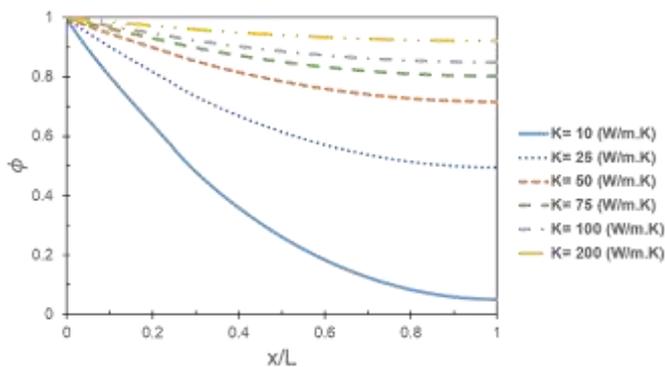


Fig. 6. Effect of thermal conductivity coefficient on the temperature distribution of the fin surface.

In this part, the results of simulations are used in order to provide a better understanding of the problem. Fig. 6 shows the effect of thermal conductivity on the heat transfer of a fin with a variable heat transfer coefficient. As can be seen, increasing the thermal conductivity results in increasing the heat transfer rate in the entire fin that leads to enhancing the temperature of the tip because of a faster heat conduction in the fin. Fig. 7 illustrates the effect of heat transfer coefficient on the temperature distribution of the fin. For each case, the first heat transfer coefficient corresponds to the first 0.01 m and the next 0.03 m, respectively. As increasing the heat transfer coefficient takes place, a significant decrease in the temperature distribution is observed due to a greater heat loss to the environment. Furthermore, Fig. 8 demonstrates the results of fins with a convective and isolated tip. In the fin

with a convective tip, increasing the total heat transfer rate has enhanced the heat loss because at any certain distance from the base, the convective fin has about 5% less temperature.

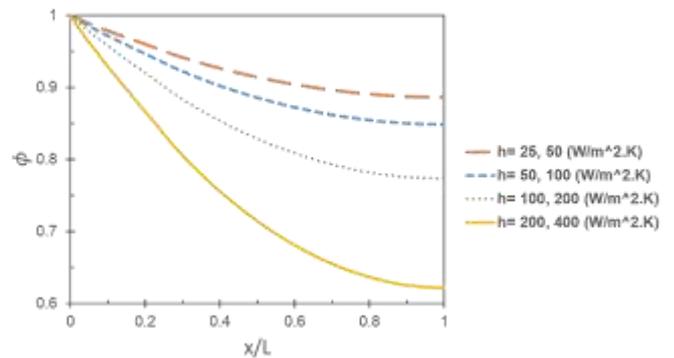


Fig. 7. Effect of heat transfer coefficient on the temperature distribution of the fin.

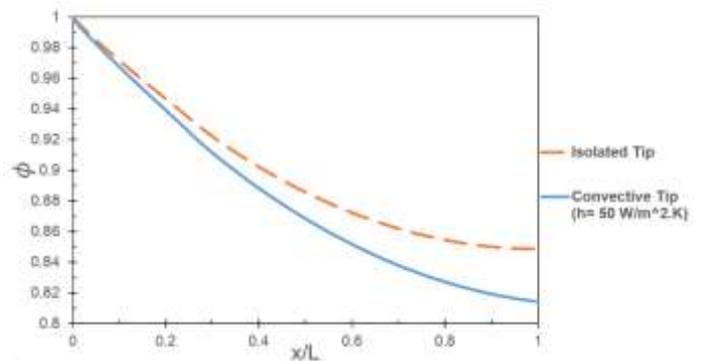


Fig. 8. The temperature distribution of fins with isolated and convective tip.

IV. CONCLUSION

In the presented study, a numerical approach was used to simulate heat transfer in a fin with a variable heat transfer coefficient. In the literature, there are analytical solutions derived for the heat transfer in fins with a variable or constant heat transfer coefficient. Nonetheless, these analytical techniques sometimes are not numerically efficient or hard to solve for different boundary conditions. The partial differential equation (PDE) solver from the COMSOL mathematics toolbox was used to solve the steady state heat transfer in a two-dimensional fin with a variable heat transfer coefficient. The temperature distribution plot obtained by COMSOL had a high accuracy with less than 5% deviation compared to the analytical solution presented in the literature. In addition, using the simulation model, a comparison made between fins with isolated and convective tip that showed about 5% decrease in the temperature distribution of the fin with a convective tip.

REFERENCES

- [1] T. L. Bergman, A. S. Lavine, F. P. Incropera, and D. P. Dewitt, *Fundamentals of Heat and Mass Transfer*, John Wiley & Sons, 2011.
- [2] A. D. Kraus, A. Aziz, and J. Welty, *Extended Surface Heat Transfer*, John Wiley & Sons, 2002.
- [3] R. M. Manglik and A. E. Bergles, "Heat transfer and pressure drop correlations for the rectangular offset strip fin compact heat exchanger," *Experimental Thermal and Fluid Science*, vol. 10, issue 2, pp. 171-180, 1995.

- [4] P. G. Gabuzda, Heat sink device assembly for encumbered IC package, 1988, Google Patents.
- [5] A. Sepehri and M.-H. Sarrafzadeh, "Effect of nitrifiers community on fouling mitigation and nitrification efficiency in a membrane bioreactor," *Chemical Engineering and Processing - Process Intensification*, vol. 128, pp. 10-18, 2018.
- [6] M. Özisik, *Heat Conduction*, Wiley, New York, 1980.
- [7] M. L. Ghai, Heat transfer in straight fins General Discussion on Heat Transfer, pp. 180-182, 1951.
- [8] H. Barrow, J. Mistry, and D. Clayton, "Numerical and exact mathematical analyses of two dimensional rectangular composite fins," in *Proc. 8th International Heat Transfer Conference, San Francisco*, 1986.
- [9] L. Han, and S. Lefkowitz, "Constant cross section fin efficiencies for non-uniform surface heat transfer coefficients," *ASME paper*, 60, 1960.
- [10] Chen, S. and G. Zyskowski, "Steady state heat conduction in a straight fin with variable heat transfer coefficient," *ASME paper*, 63, 1963.
- [11] P. Heggs, and P. Stones, "The effects of dimensions on the heat flowrate through extended surfaces," *Journal of Heat Transfer*, vol. 102, issue 1, pp. 180-182, 1980.
- [12] N. Suryanarayana, "Two-dimensional effects on heat transfer rates from an array of straight fins," *Journal of Heat Transfer*, vol. 99, issue 1, pp. 129-132, 1977.
- [13] S. Ma, A. Behbahani, and Y. Tsuei, "Two-dimensional rectangular fin with variable heat transfer coefficient," *International Journal of Heat and Mass Transfer*, vol. 34, issue 1, pp. 79-85, 1991.
- [14] N. C. DeJong, L. W. Zhang, A. M. Jacobi, and D. K. Tafti, "A complementary experimental and numerical study of the flow and heat transfer in offset strip-fin heat exchangers," *Journal of Heat Transfer*, vol. 120, issue 3, pp. 690-698, 1998.
- [15] Y. L. He, W. Q. Tao, F. Q. Song, and W. Zhang, "Three-dimensional numerical study of heat transfer characteristics of plain plate fin-and-tube heat exchangers from view point of field synergy principle," *International Journal of Heat and Fluid Flow*, vol. 26, issue 3, pp. 459-473, 2005.
- [16] N. Namdari, M. Abdi, H. Chaghomi, and F. Rahmani, "Numerical solution for transient heat transfer in longitudinal fins," *International Research Journal of Advanced Engineering and Science*, vol. 3, issue 2, pp. 131-136, 2018.
- [17] Y. Zhu and Y. Li, "Three-dimensional numerical simulation on the laminar flow and heat transfer in four basic fins of plate-fin heat exchangers," *Journal of Heat Transfer*, vol. 130, issue 11, pp. 111801, 2008.
- [18] W. Q. Tao, Y. L. He, Q. W. Wang, Z. G. Qu, and F. Q. Song, "A unified analysis on enhancing single phase convective heat transfer with field synergy principle," *International Journal of Heat and Mass Transfer*, vol. 45, issue 24, pp. 4871-4879, 2002.
- [19] N. Namdari and A. Dehghan, "Natural frequencies and mode shapes for vibrations of rectangular and circular membranes: A numerical study," *International Research Journal of Advanced Engineering and Science*, vol. 3, issue 2, pp. 30-34, 2018.
- [20] T. Ma, X. Lu, J. Pandit, S. V. Ekkad, S. T. Huxtable, S. Deshpande, and Q.-W. Wang, "Numerical study on thermoelectric-hydraulic performance of a thermoelectric power generator with a plate-fin heat exchanger with longitudinal vortex generators," *Applied Energy*, vol. 185, part 2, pp. 1343-1354, 2017.
- [21] H. Zamanian, M. K. Farahani, and A. Assempour, "Initial blank design of deep drawn metal matrix composites using invers finite element method," in *20th Annual International Conference on Mechanical Engineering-ISME*, 2012.
- [22] A. Amerinatanzi, H. Zamanian, N. S. Moghaddam, A. Jahadabkar, M. Elahinia, "Application of the superelastic NiTi spring in ankle foot orthosis (AFO) to create normal ankle joint behavior," *Bioengineering*, vol. 4, issue 4, pp. 95, 2017.
- [23] N. S. Moghaddam, A. Jahadabkar, A. Amerinatanzi, M. Elahinia, M. Miller, and D. Dean, "Metallic fixation of mandibular segmental defects: Graft immobilization and orofacial functional maintenance," *Plastic and Reconstructive Surgery Global Open*, vol. 4, issue 9, 2016.
- [24] A. Joukar, E. Nammakie, and H. Niroomand-Oscuii, "A comparative study of thermal effects of 3 types of laser in eye: 3D simulation with bioheat equation," *Journal of Thermal Biology*, vol. 49, pp. 74-81, 2015.
- [25] J.-Y. Jang, M.-C. Wu, and W.-J. Chang, "Numerical and experimental studies of threedimensional plate-fin and tube heat exchangers," *International Journal of Heat and Mass Transfer*, vol. 39, issue 14, pp. 3057-3066, 1996.
- [26] H. Zamanian and M. Salehi, "Modification to Heywood's equations to estimate the stress concentration factors for unidirectional glass epoxy laminates with circular and square holes," *International Research Journal of Advanced Engineering and Science*, vol. 1, issue 4, pp. 18-25, 2016.
- [27] N. S. Moghaddam, R. Skoracki, M. Miller, M. Elahinia, and D. Dean, "Three dimensional printing of stiffness-tuned, nitinol skeletal fixation hardware with an example of mandibular segmental defect repair," *Procedia CIRP*, vol. 49, pp. 45-50, 2016.
- [28] A. Joukar, A. Shah, A. Kiapour, A. S. Vosoughi, B. Duhon, A. K. Agarwal, H. Elgafy, N. Ebraheim, V. K. Goel, "Gender specific sacroiliac joint biomechanics during standing upright: A finite element study," *Spine*, 2018.
- [29] I. Samani and A. Sedaghat, "A novel MAV with treadmill motion of wing," *Theoretical and Applied Mechanics Letters*, vol. 3, issue 6, 2013.
- [30] M. Mehdizadeh and S. Akbarzadeh, "Experimental investigation and a model to predict the steady-state friction coefficient in the lubricated contact," *STLE*, Vegas, 2016.
- [31] A. Dehghan Ghadikolaei, and M. Vahdati, "Experimental study on the effect of finishing parameters on surface roughness in magneto-rheological abrasive flow finishing process," *Proceedings of the Institution of Mechanical Engineers, Part B: Journal of Engineering Manufacture*, vol. 229, issue 9, pp. 1517-1524, 2015.
- [32] A. Joukar, J. Mehta, D. Marks, and V. K. Goel, "Lumbar-Sacral destruction fixation biomechanics: A finite element study," *The Spine Journal*, vol. 17, issue 11, pp. S335, 2017.
- [33] A. Sedaghat, I. Samani, M. Ahmadi-Baloutaki, M. El Haj Assad, M. Gaith, "Computational study on novel circulating aerofoils for use in Magnus wind turbine blades," *Energy*, vol. 91, pp. 393-403, 2015.
- [34] A. Dehghanghadikolaei, N. Namdari, B. Mohammadian, and S. Reza Ghoreishi, "Deriving one dimensional shallow water equations from mass and momentum balance laws," *International Research Journal of Engineering and Technology*, vol. 5, issue 6, pp. 408-419, 2018.
- [35] B. Eskandari, B. Davoodi, and H. Ghorbani, "Multi-objective optimization of parameters in turning of N-155 iron-nickel-base superalloy using gray relational analysis," *Journal of the Brazilian Society of Mechanical Sciences and Engineering*, vol. 40, issue 4, pp. 233, 2018.
- [36] M. Mehdizadeh, and M. Khonsari, "On the role of internal friction in low-and high-cycle fatigue," *International Journal of Fatigue*, vol. 114, pp. 159-166, 2018.
- [37] N. S. Moghaddam, A. Jahadabkar, A. Amerinatanzi, R. Skoracki, M. Miller, D. Dean, and M. Elahinia, "Fixation Release and the Bone Bandaid: A New Bone Fixation Device Paradigm," *Bioengineering*, vol. 4, issue 1, pp. 5, 2017.
- [38] B. Davoodi, and B. Eskandari, "Tool wear mechanisms and multi-response optimization of tool life and volume of material removed in turning of N-155 iron-nickel-base superalloy using RSM," *Measurement*, vol. 68, pp. 286-294, 2015.
- [39] M. Sarayloo and R. Mahinroosta, "Analysis of the impacts of a tunnel on a normal fault rupture through uniform soil cover, in Geo-China, vol. 2016, pp. 141-149, 2016.
- [40] R. Ghoreishi, A. H. Roohi, and A. D. Ghadikolaei, "Analysis of the influence of cutting parameters on surface roughness and cutting forces in high speed face milling of Al/SiC MMC," *Materials Research Express*, 2018.
- [41] A. Dehghanghadikolaei, J. Ansary, and R. Ghoreishi, "Sol-gel process applications: A mini-review," *Proceedings of the Nature Research Society*, vol. 2, issue 1, pp. 02008, 2018.
- [42] B. Fotovvati, S. F. Wayne, G. Lewis, and E. Asadi, "A review on melt-pool characteristics in laser welding of metals," *Advances in Materials Science and Engineering*, vol. 2018, 2018.
- [43] A. Joukar, H. Niroomand-Oscuii, and F. Ghalichi, "Numerical simulation of osteocyte cell in response to directional mechanical loadings and mechanotransduction analysis: Considering lacunar-canalicular interstitial fluid flow," *Computer Methods and Programs in Biomedicine*, vol. 133, pp. 133-141, 2016.
- [44] A. Akbarzadeh, M. Mehdizadeh, S. Akbarzadeh, and K. Shams, "Effect of nanoparticles on the running-in behavior in lubricated point contact," *STLE*, Dallas, 2015.

- [45] M. Mehdizadeh, S. Akbarzadeh, K. Shams, M. M. Khonsari, "Experimental investigation on the effect of operating conditions on the running-in behavior of lubricated elliptical contacts," *Tribology Letters*, vol. 59, issue 1, pp. 6, 2015.
- [46] H. Zamanian, B. Marzban, P. Bagheri, and M. Gudarzi, "On stress concentration factor for randomly oriented discontinuous fiber laminas with circular/square hole," *Journal of Science and Engineering*, vol. 3, issue 1, pp. 7-18, 2013.
- [47] H. Ibrahim, A. Jahadakbar, A. Dehghan, N. S. Moghaddam, A. Amerinatanzi, and M. Elahinia, "In Vitro corrosion assessment of additively manufactured Porous NiTi structures for bone fixation applications," *Metals*, vol. 8, issue 3, pp. 164, 2018.